

Safak®

Perfect Connection





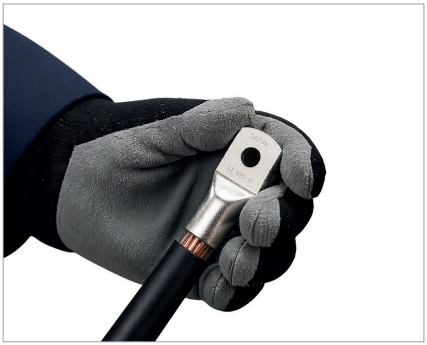

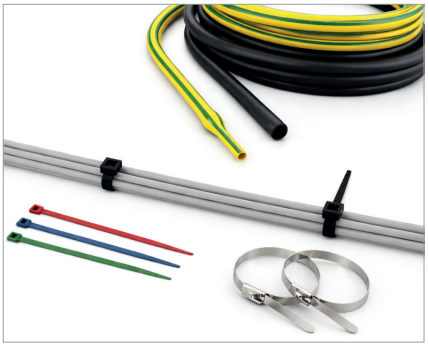

INDUSTRIAL PRODUCT PORTFOLIO

www.safakelektrik.com.tr



E TYPE CABLE LUGS

You must crimp E Type Cable Lugs with Standard Type Dies !

mm²	M5	M6	M8	M10	M12	M16
10	E 01005					
16		E 01606				
25			E 02508			
35			E 03508			
50				E 05010		
70				E 07010		
95				E 09510		
120					E 12012	
150					E 15012	
185						E 18516
240						E 24016

- High Conductivity
- Active Corrosion Resistance
- Easy Crimping and Installation

- Made of electrolytic copper, fully annealed, tin-plated, the cable lugs are tempered at 700 °C during the production process to provide easier and more practical usage while preventing breakage and loosening after the crimping process.



STANDARD TYPE CABLE LUGS

! You must crimp Standard Type Cable Lugs with Standard Type Dies

mm²	M5	M6	M8	M10	M12	M14	M16	M20
10	ST 01005	ST 01006	ST 01008					
16	ST 01605	ST 01606	ST 01608	ST 01610				
25		ST 02506	ST 02508	ST 02510	ST 02512			
35		ST 03506	ST 03508	ST 03510	ST 03512			
50		ST 05006	ST 05008	ST 05010	ST 05012	ST 05014		
70			ST 07008	ST 07010	ST 07012	ST 07014	ST 07016	
95			ST 09508	ST 09510	ST 09512	ST 09514	ST 09516	
120				ST 12010	ST 12012	ST 12014	ST 12016	ST 12020
150				ST 15010	ST 15012	ST 15014	ST 15016	
185				ST 18510	ST 18512	ST 18514	ST 18516	
240				ST 24010	ST 24012	ST 24014	ST 24016	
300					ST 30012	ST 30014	ST 30016	
400					ST 40012		ST 40016	ST 40020
500							ST 50016	ST 50020
600								ST 60020

- High Conductivity
- Active Corrosion Resistance
- Easy Crimping and Installation

- Made of electrolytic copper, fully annealed, tin-plated, the cable lugs are tempered during the production process to provide easier and more practical usage while preventing breakage and loosening after the crimping process.



EURO TYPE CABLE LUGS

You must crimp Euro Type Cable Lugs with Euro Type Dies !

mm²	M5	M6	M8	M10	M12	M14	M16	M20
6		DE 00606	DE 00608					
10	DE 01005	DE 01006	DE 01008	DE 01010				
16		DE 01606	DE 01608	DE 01610				
25	DE 02505	DE 02506	DE 02508	DE 02510	DE 02512			
35		DE 03506	DE 03508	DE 03510	DE 03512			
50		DE 05006	DE 05008	DE 05010	DE 05012	DE 05014	DE 05016	
70			DE 07008	DE 07010	DE 07012	DE 07014		
95			DE 09508	DE 09510	DE 09512	DE 09514	DE 09516	
120			DE 12008	DE 12010	DE 12012	DE 12014	DE 12016	
150			DE 15008	DE 15010	DE 15012	DE 15014	DE 15016	
185				DE 18510	DE 18512	DE 18514	DE 18516	
240				DE 24010	DE 24012	DE 24014	DE 24016	DE 24020
300					DE 30012	DE 30014	DE 30016	DE 30020
400					DE 40012	DE 40014	DE 40016	DE 40020

- High Conductivity
- Active Corrosion Resistance
- Easy Crimping and Installation

- Made of electrolytic copper, fully annealed, tin-plated, the cable lugs are tempered during the production process to provide easier and more practical usage while preventing breakage and loosening after the crimping process.



DIN 46235 TYPE CABLE LUGS

! You must crimp DIN Norm Cable Lugs with DIN Norm Dies

mm²	M5	M6	M8	M10	M12	M16	M20
10	DIN 01005	DIN 01006	DIN 01008				
16		DIN 01606	DIN 01608	DIN 01610			
25		DIN 02506	DIN 02508	DIN 02510	DIN 02512		
35			DIN 03508	DIN 03510	DIN 03512		
50			DIN 05008	DIN 05010	DIN 05012	DIN 05016	
70			DIN 07008	DIN 07010	DIN 07012	DIN 07016	
95				DIN 09510	DIN 09512	DIN 09516	
120				DIN 12010	DIN 12012	DIN 12016	DIN 12020
150				DIN 15010	DIN 15012	DIN 15016	DIN 15020
185				DIN 18510	DIN 18512	DIN 18516	DIN 18520
240					DIN 24012	DIN 24016	DIN 24020
300						DIN 30016	DIN 30020
400						DIN 40016	DIN 40020
500							DIN 50020
625							DIN 62520

- High Conductivity
- Active Corrosion Resistance
- Easy Crimping and Installation

- Made of electrolytic copper, fully annealed, tin-plated, the cable lugs are tempered during the production process to provide easier and more practical usage while preventing breakage and loosening after the crimping process.



EURO TYPE 45° CABLE LUGS

You must crimp Euro Type Cable Lugs with Euro Type Dies!

mm²	M5	M6	M8	M10	M12	M16
10	DE45 01005	DE45 01006	DE45 01008			
16		DE45 01606	DE45 01608	DE45 01610		
25		DE45 02506	DE45 02508	DE45 02510		
35		DE45 03506	DE45 03508	DE45 03510		
50		DE45 05006	DE45 05008	DE45 05010	DE45 05012	
70			DE45 07008	DE45 07010	DE45 07012	
95			DE45 09508	DE45 09510	DE45 09512	
120				DE45 12010	DE45 12012	
150				DE45 15010	DE45 15012	DE45 15016
185				DE45 18510	DE45 18512	DE45 18516
240				DE45 24010	DE45 24012	DE45 24016

- High Conductivity
- Active Corrosion Resistance
- Easy Crimping and Installation

- Made of electrolytic copper, fully annealed, tin-plated, the cable lugs are tempered during the production process to provide easier and more practical usage while preventing breakage and loosening after the crimping process.

NARROW PALM CABLE LUGS




! You must crimp Narrow Palm Cable Lugs with Euro Type Dies

mm²	M6	M8	M10	M12	M16
35	DG 03506				
50	DG 05006	DG 05008	DG 05010		
70		DG 07008	DG 07010	DG 07012	
95		DG 09508	DG 09510	DG 09512	
120		DG 12008	DG 12010	DG 12012	
150		DG 15008	DG 15010	DG 15012	
185			DG 18510	DG 18512	DG 18516
240			DG 24010	DG 24012	DG 24016

- High Conductivity
- Active Corrosion Resistance
- Easy Crimping and Installation

- Made of electrolytic copper, fully annealed, tin-plated, the cable lugs are tempered during the production process to provide easier and more practical usage while preventing breakage and loosening after the crimping process.



EURO TYPE 90° CABLE LUGS


You must crimp Euro Type Cable Lugs with Euro Type Dies!

mm²	M5	M6	M8	M10	M12	M16
10	DE90 01005	DE90 01006	DE90 01008			
16		DE90 01606	DE90 01608	DE90 01610		
25		DE90 02506	DE90 02508	DE90 02510		
35		DE90 03506	DE90 03508	DE90 03510		
50		DE90 05006	DE90 05008	DE90 05010	DE90 05012	
70			DE90 07008	DE90 07010	DE90 07012	
95			DE90 09508	DE90 09510	DE90 09512	
120				DE90 12010	DE90 12012	
150				DE90 15010	DE90 15012	DE90 15016
185				DE90 18510	DE90 18512	DE90 18516
240				DE90 24010	DE90 24012	DE90 24016

- High Conductivity
- Active Corrosion Resistance
- Easy Crimping and Installation


- Made of electrolytic copper, fully annealed, tin-plated, the cable lugs are tempered during the production process to provide easier and more practical usage while preventing breakage and loosening after the crimping process.

DIN 46234 TYPE ROUND AND WELDED CABLE LUGS



mm²	M3	M4	M5	M6	M8	M10	M12	M16
1,5	SFK-3-1	SFK-4-1	SFK-5-1	SFK-6-1				
2,5	SFK-3-2,5	SFK-4-2,5	SFK-5-2,5	SFK-6-2,5	SFK-8-2,5	SFK-10-2,5	SFK-12-2,5	
6		SFK-4-6	SFK-5-6	SFK-6-6	SFK-8-6	SFK-10-6	SFK-12-6	
10			SFK-5-10I	SFK-6-10I	SFK-8-10I	SFK-10-10I	SFK-12-10I	
16			SFK-5-16I	SFK-6-16I	SFK-8-16I	SFK-10-16I	SFK-12-16I	
25			SFK-5-25I	SFK-6-25I	SFK-8-25I	SFK-10-25I	SFK-12-25I	SFK-16-25I
35				SFK-6-35I	SFK-8-35I	SFK-10-35I	SFK-12-35I	SFK-16-35I
50				SFK-6-50I	SFK-8-50I	SFK-10-50I	SFK-12-50I	SFK-16-50I
70				SFK-6-70I	SFK-8-70I	SFK-10-70I	SFK-12-70I	SFK-16-70I
95					SFK-8-95I	SFK-10-95I	SFK-12-95I	SFK-16-95I
120					SFK-8-120I	SFK-10-120I	SFK-12-120I	SFK-16-120I
150						SFK-10-150I	SFK-12-150I	SFK-16-150I
185							SFK-12-185I	SFK-16-185I
240							SFK-12-240I	SFK-16-240I

- Manufactured according to DIN 46234.
- There is brazing solder on crimping area
- Chamfered profile for advanced crimping



STANDART TYPE BUTT-CONNECTORS

You must crimp Standard Type Butt-Connectors with Standard Type Dies !

mm²	PRODUCT CODE	mm²	PRODUCT CODE	mm²	PRODUCT CODE
6	ST EM006	70	ST EM070	300	ST EM300
10	ST EM010	95	ST EM095	400	ST EM400
16	ST EM016	120	ST EM120	500	ST EM500
25	ST EM025	150	ST EM150	600	ST EM625
35	ST EM035	185	ST EM185		
50	ST EM050	240	ST EM240		

- High Conductivity
- Active Corrosion Resistance
- Easy Crimping and Installation

- Made of electrolytic copper, fully annealed, tin-plated, the cable lugs are tempered during the production process to provide easier and more practical usage while preventing breakage and loosening after the crimping process.


MECHANICAL BOLTED CABLE LUGS



mm²	M12	M16
25-95	ML-25-95 M12	
35-150	ML-35-150 M12	
70-240	ML-70-240 M12	
185-400		ML-185-400 M16

- Central hole and tapered edge design
- Moisture-blocking barrier structure
- Wide application range

- Compatible with aluminium and copper (XLPE) cables, the product features a bolted structure with shear-off bolts that break at the specified torque value, and is manufactured with a tin-plated aluminium alloy body and bolts.



DIN 46235 TYPE BUTT-CONNECTORS

You must crimp DIN Type Butt-Connectors with DIN Norm Dies !

mm²	PRODUCT CODE	mm²	PRODUCT CODE	mm²	PRODUCT CODE
10	DIN EM010	70	DIN EM070	240	DIN EM240
16	DIN EM016	95	DIN EM095	300	DIN EM300
25	DIN EM025	120	DIN EM120	400	DIN EM400
35	DIN EM035	150	DIN EM150	500	DIN EM500
50	DIN EM050	185	DIN EM185	625	DIN EM625


- High Conductivity
- Active Corrosion Resistance
- Easy Crimping and Installation

- Made of electrolytic copper, fully annealed, tin-plated, the cable lugs are tempered during the production process to provide easier and more practical usage while preventing breakage and loosening after the crimping process.

MECHANICAL BOLTED BUTT-CONNECTORS



mm²	PRODUCT CODE
25-95	MC-25-95
35-150	MC-35-150
70-240	MC-70-240
185-400	MC-185-400



EURO TYPE BUTT-CONNECTORS

You must crimp Euro Type Butt-Connectors with Euro Type Dies !

mm²	PRODUCT CODE	mm²	PRODUCT CODE	mm²	PRODUCT CODE
10	DE EM010	70	DE EM070	240	DE EM240
16	DE EM016	95	DE EM095	300	DE EM300
25	DE EM025	120	DE EM120	400	DE EM400
35	DE EM035	150	DE EM150		
50	DE EM050	185	DE EM185		

- High Conductivity
- Active Corrosion Resistance
- Easy Crimping and Installation

- Made of electrolytic copper, fully annealed, tin-plated, the cable lugs are tempered during the production process to provide easier and more practical usage while preventing breakage and loosening after the crimping process.

ALUMINUM BUTT-CONNECTORS

! You must crimp Aluminum Butt-Connectors with Aluminum Dies



mm²	PRODUCT CODE	mm²	PRODUCT CODE	mm²	PRODUCT CODE
16	AL EM016	70	AL EM070	185	AL EM185
25	AL EM025	95	AL EM095	240	AL EM240
35	AL EM035	120	AL EM120	300	AL EM300
50	AL EM050	150	AL EM150	400	AL EM400

- Marked design for correct and reliable crimping
- Precision entry structure for easy cable insertion



ALUMINUM CABLE LUGS

You must crimp Aluminum Cable Lugs with Aluminum Dies !

mm²	M8	M10	M12	M16	M20
16	AL 01608	AL 01610			
25	AL 02508	AL 02510			
35		AL 03510	AL 03512		
50		AL 05010	AL 05012		
70		AL 07010	AL 07012		
95		AL 09510	AL 09512	AL 09516	
120			AL 12012	AL 12016	
150			AL 15012	AL 15016	AL 15020
185			AL 18512	AL 18516	AL 18520
240			AL 24012	AL 24016	AL 24020
300				AL 30016	AL 30020
400				AL 40016	AL 40020

- Marked design for correct and reliable crimping
- Precision entry structure for easy cable insertion



BIMETAL (CU/AL) CABLE LUGS

mm²	10	16	25	35	50	70
16	AL16/CU10	AL16/CU16				
25	AL25/CU10	AL25/CU16	AL25/CU25			
35		AL35/CU16	AL35/CU25	AL35/CU35		
50			AL50/CU25	AL50/CU35	AL50/CU50	
70				AL70/CU35	AL70/CU50	AL70/CU70
95					AL95/CU50	AL95/CU70
120						AL120/CU70

mm²	95	120	150	185	240	300
95	AL95/CU95					
120	AL120/CU95	AL120/CU120				
150	AL150/CU95	AL150/CU120	AL150/CU150			
185		AL185/CU120	AL185/CU150	AL185/CU185		
240			AL240/CU150	AL240/CU185	AL240/CU240	
300				AL300/CU185	AL300/CU240	AL300/CU300

- Central barrier design
- Special sealing compound for leak protection
- Friction welded structure



BS2 BIMETAL (CU/AL) CABLE LUGS

mm²	M8	M10	M12	M16
10	BS2 01008			
16	BS2 01608	BS2 01610	BS2 01612	
25	BS2 02508	BS2 02510	BS2 02512	
35	BS2 03508	BS2 03510	BS2 03512	
50	BS2 05008	BS2 05010	BS2 05012	
70	BS2 07008	BS2 07010	BS2 07012	
95	BS2 09508	BS2 09510	BS2 09512	
120	BS2 12008	BS2 12010	BS2 12012	
150	BS2 15008	BS2 15010	BS2 15012	
185	BS2 18508	BS2 18510	BS2 18512	
240		BS2 24010	BS2 24012	BS2 24016
300		BS2 30010	BS2 30012	BS2 30016
400		BS2 40010	BS2 40012	BS2 40016
500		BS2 50010	BS2 50012	BS2 50016

- Design compatible with pre-rounded sector-shaped conductors



BSD BIMETAL (CU/AL) CABLE LUGS

mm²	M8	M10
16	BSD 01608	
25	BSD 02508	
35	BSD 03508	
50	BSD 05008	
70	BSD 07008	
95	BSD 09508	
120		BSD 12010
150		BSD 15010
185		BSD 18510
240		BSD 24010
300		BSD 30010



INSULATED CORD END TERMINALS

French ve German Color Norm (DIN 46228)

mm²	PRODUCT CODE	FRENCH COLOR NORM		PRODUCT CODE	GERMAN COLOR NORM	
0,30	UY-3003		Pink	-	-	-
0,50	UY-3005		White	UY-2005		Orange
0,75	UY-3007		Blue	UY-2007		White
1	UY-3010		Red	UY-2010		Yellow
1,50	UY-3015		Black	UY-2015		Red
	UY-3015/10		Black	-	-	-
	UY-3015/18		Black	UY-2015/18		Red
2,50	UY-3025		Grey	UY-2025		Blue
	UY-3025/12		Grey	UY-2025/12		Blue
	-	-	-	UY-2025/18		Blue
4	UY-3040		Orange	UY-2040		Grey
	-	-	-	UY-2040/12		Grey
	-	-	-	UY-2040/18		Grey
6	UY-3060		Green	UY-2060		Black
	-	-	-	UY-2060/18		Black
10	UY-3100		Brown	UY-2100		Beige
	-	-	-	UY-2100/18		Beige
16	UY-3160		Ivory	UY-2160		Green
	-	-	-	UY-2160/18		Green
25	UY-3250		Black	UY-2250		Brown
35	UY-3350		Red	UY-2350		Beige
50	UY-3500		Blue	UY-2500		Olive
70	UY-3700		Yellow	-	-	-



INSULATED TWIN CORD END TERMINALS

mm²	CODE	COLOR	
2 x 0,50	UY-23005		White
2 x 0,75	UY-23007		Blue
2 x 1,00	UY-23010		Red
2 x 1,50	UY-23015		Black
2 x 2,50	UY-23025		Grey
2 x 4,00	UY-23040		Orange
2 x 6,00	UY-23060		Green
2 x 10,00	UY-23100		Brown
2 x 16,00	UY-23160		Beige



BLADE TYPE INSULATED CABLE TERMINALS

mm²	COLOR	PRODUCT CODE
0,50-1,50		IK-101/14
1,50-2,50		IK-102/18



PIN TYPE INSULATED CABLE TERMINALS

mm²	COLOR	PRODUCT CODE
0,50-1,50		IK-101I
1,50-2,50		IK-102I
4,00-6,00		IK-106I



RING TYPE INSULATED CABLE TERMINALS

DIN 46237 (PVC & Standart Entry)

mm²	COLOR	BOLT	CODE
0,50-1,50		M3	YK-301KPVC
		M4	YK-401KPVC
		M5	YK-501KPVC
		M6	YK-601KPVC
		M8	YK-801KPVC
1,50-2,50		M3	YK-302MPVC
		M4	YK-402MPVC
		M5	YK-502MPVC
		M6	YK-602MPVC
		M8	YK-802MPVC
		M10	YK-1002MPVC
		M12	YK-1202MPVC
4,00-6,00		M4	YK-406SPVC
		M5	YK-506SPVC
		M6	YK-606SPVC
		M8	YK-806SPVC
		M10	YK-1006SPVC
		M12	YK-1206SPVC



FORK TYPE INSULATED CABLE TERMINALS

DIN 46237 (PVC & Standart Entry)

mm²	COLOR	BOLT	CODE
0,50-1,50		M3	CK-301KPVC
		M4	CK-401KPVC
		M5	CK-501KPVC
		M6	CK-601KPVC
1,50-2,50		M3	CK-302MPVC
		M4	CK-402MPVC
		M5	CK-502MPVC
		M6	CK-602MPVC
4,00-6,00		M4	CK-406SPVC
		M5	CK-506SPVC
		M6	CK-606SPVC
		M8	CK-806SPVC
		M10	CK-1006SPVC



DIN 46228 TYPE NON-INSULATED CORD END TERMINALS

mm²	PRODUCT CODE
0,50	KY-0,50/6
	KY-0,50
0,75	KY-0,75
1,00	KY-1,00
1,50	KY-1,50/7
	KY-1,50
2,50	KY-2,50/8
	KY-2,50

mm²	PRODUCT CODE
4	KY-4,00
6	KY-6,00
10	KY-10/12
	KY-10
16	KY-16/12
	KY-16
25	KY-25
35	KY-35

mm²	PRODUCT CODE
50	KY-50
70	KY-70
95	KY-95
120	KY-120
150	KY-150



MALE TERMINALS INSULATED CABLE TERMINALS

mm²	COLOR	PRODUCT CODE
0,50-1,50		BE-1040
1,50-2,50		BE-2040
		BE-2050
4,00-6,00		BE-5050



FEMALE TERMINALS INSULATED CABLE TERMINALS

mm²	COLOR	PRODUCT CODE
0,50-1,50		BD-1040
1,50-2,50		BD-2040
		BD-2050
4,00-6,00		BD-5050



DIN 46230 TYPE NON-INSULATED CABLE TERMINALS

mm²	PRODUCT CODE	mm²	PRODUCT CODE
10	IK-110/12I	50	IK-150/20I
16	IK-116/13I	70	IK-170/25I
25	IK-125/15I	95	IK-195/25I
35	IK-135/20I		



FULLY POLIAMID INSULATED FEMALE DISCONNECTORS

mm²	COLOR	PRODUCT CODE
0,50-1,50		PFD-1288
		PFD-1638
1,50-2,50		PFD-2638
4,00-6,00		PFD-5638



MALE DISCONNECTORS

mm²	COLOR	PRODUCT CODE
0,50-1,50		FE-1288
		FE-1488
		FE-1688
1,50-2,50		FE-2488
		FE-2638
4,00-6,00		FE-5638



BUTT-SPLICE CONNECTORS

mm²	COLOR	PRODUCT CODE
0,50-1,50		BY-251
1,50-2,50		BY-252
4,00-6,00		BY-256



FEMALE DISCONNECTORS INSULATED CABLE TERMINALS

mm²	COLOR	PRODUCT CODE
0,50-1,50		FD-1288/5
		FD-1288
		FD-1488/5
		FD-1488
		FD-1638
		FD-1778
1,50-2,50		FD-2288
		FD-2488
		FD-2638
		FD-2778
4,00-6,00		FD-5488
		FD-5638
		FD-5956



FULLY INSULATED FEMALE DISCONNECTORS INSULATED CABLE TERMİNALS

mm²	COLOR	PRODUCT CODE
0,50-1,50		FFD-1288/5
		FFD-1288
		FFD-1488/5
		FFD-1488
		FFD-1638
1,50-2,50		FFD-2488
		FFD-2638
4,00-6,00		FFD-5638



PIGGY BACK DISCONNECTORS INSULATED CABLE TERMINALS

mm²	COLOR	PRODUCT CODE
0,50-1,50		FDEG-1861
1,50-2,50		FDEG-2862
4,00-6,00		FDEG-5866



FLAG FEMALE DISCONNECTORS INSULATED CABLE TERMINALS

mm²	COLOR	PRODUCT CODE
0,50-1,50		PFDEB-1861
1,50-2,50		PFDEB-2862



SFK-Y0816
CORD-END SLEEVE CRIMPING TOOLS

CROSS SECTION	0,08 - 16 mm²
CRIMPING TECHNIC	Linear
CONDUCTOR POINT	Front
LENGTH	215 mm
WEIGHT	0,50 kg



SFK-I0506
INSULATED TERMINALS CRIMPING TOOL

CROSS SECTION	Red 0,5 - 1
	Blue 1,5 - 2,5
	Yellow 4 - 6
LENGTH	220 mm
WEIGHT	0,50 kg



SFK-Y1025 / SFK-Y3550

CROSS SECTION	10 - 50 mm²
LENGTH	304 mm
WEIGHT	0,60 kg



SFK-S0316
CABLE STRIPPING TOOLS

STRIPPING RANGE	0,03 - 16 mm²
LENGTH	202 mm
WEIGHT	0,195 kg



SFY0256

CROSS SECTION	0,25 - 6 mm²
CRIMPING TECHNIC	Linear
CONDUCTOR POINT	Front
LENGTH	160 mm
WEIGHT	0,35 kg



KM-95
COPPER CABLE CUTTER

MAX. CROSS SECTION	95 mm² or 4x16 mm²
LENGTH	410 mm
WEIGHT	1,00 kg



KM-240
COPPER CABLE CUTTER

MAX. CROSS SECTION	240 mm² or 3x35 + 10 mm²
LENGTH	690 mm
WEIGHT	2,20 kg




SCC-250
COPPER CABLE CUTTER

MAX. CROSS SECTION	325 mm² or 3x70 + 35 mm²
LENGTH	640 mm
WEIGHT	1,90 kg



SCC-500
COPPER CABLE CUTTER

MAX. CROSS SECTION	500 mm² or 3x120 + 70 mm²
LENGTH	800 mm
WEIGHT	3,00 kg



OGS-60
XLPE CABLE STRIPPING TOOL

STRIPPING RANGE	Ø 20,0 - 60,0
LENGTH	220 mm
WEIGHT	1,50 kg



SFK-K07516
CABLE LUG CRIMPING TOOL

CROSS SECTION	0,75 - 16,00 mm²
LENGTH	285 mm
WEIGHT	0,575 kg



SP-0650STD
CABLE LUG CRIMPING TOOL

CRIMPING RANGE	6,00 - 50,00 mm²
LENGTH	390 mm
WEIGHT	1,20 kg



SP-10120STD
CABLE LUG CRIMPING TOOL

CRIMPING RANGE	10 - 120 mm²
LENGTH	650 mm
WEIGHT	3,00 kg



SP-25150STD
CABLE LUG CRIMPING TOOL

CRIMPING RANGE	25 - 150 mm²
LENGTH	650 mm
WEIGHT	3,00 kg



SP-300
CABLE LUG CRIMPING TOOL

CRIMPING RANGE	10 - 300 mm²
LENGTH	550 mm
WEIGHT	4,20 kg



SCR-320L
COPPER CABLE CUTTER

MAX. CROSS SECTION	320 mm²
LENGTH	250 mm
WEIGHT	0,70 kg



SCR-620
COPPER CABLE CUTTER

MAX. CROSS SECTION	620 mm²
LENGTH	360 mm
WEIGHT	0,82 kg



SCR-1000T
COPPER CABLE CUTTER

MAX. CROSS SECTION	1000 mm²
LENGTH	800 mm
WEIGHT	7,50 kg



SC-16E
COPPER CABLE CUTTER

MAX. DIAMETER	Ø 20 mm
LENGTH	640 mm
WEIGHT	2,00 kg



SCR-500ACSR
STEEL CORE ALUMINIUM CONDUCTOR CUTTER

COPPER AND ALUMINUM SOLID CABLES	up to 25,4 mm
COPPER AND ALUMINUM STRANDED CABLES	up to 32 mm
LOW CARBON STEEL	up to 9,5 mm
LENGTH	350 mm
WEIGHT	1,20 kg



S-60
HYDRAULIC CRIMPING TOOL

CRIMPING FORCE	60 kN
CRIMPING RANGE	10 - 300 mm²
STROKE	13 mm
LENGTH	470 mm
WEIGHT	3,60 kg



SC-130L
HYDRAULIC CRIMPING TOOL

CRIMPING FORCE	130 kN
CRIMPING RANGE	16 - 400 mm²
STROKE	38 mm
LENGTH	670 mm
WEIGHT	7,40 kg



SXC-130L
HYDRAULIC CABLE LUG CRIMPING HEAD

CRIMPING FORCE	130 kN
CRIMPING RANGE	16 - 400 mm²
STROKE	38 mm
LENGTH	300 mm
WEIGHT	5,20 kg



SHK-25
HYDRAULIC CABLE LUG CRIMPING HEAD

CRIMPING FORCE	250 kN
CRIMPING RANGE	16 - 600 mm²
STROKE	23 mm
LENGTH	320 mm
WEIGHT	7,50 kg



HD-2107K
TWO STAGED HYDRAULIC HAND PUMP

700 Bar
0,7 lt Oil Capacity
1,8m Hydraulic Hose



SCG-45
HYDRAULIC CABLE CUTTER

CUTTING FORCE	90 kN
MAX. CUTTING DIAMETER	45 mm²
LENGTH	770 mm
WEIGHT	8,30 kg



SCG-65
HYDRAULIC CABLE CUTTER

CUTTING FORCE	90 kN
MAX. CUTTING DIAMETER	65 mm²
LENGTH	780 mm
WEIGHT	8,20 kg



SCG-85
HYDRAULIC CABLE CUTTER

CUTTING FORCE	90 kN
MAX. CUTTING DIAMETER	85 mm²
LENGTH	820 mm
WEIGHT	8,80 kg



SXCG-65
HYDRAULIC CABLE CUTTING HEAD

CUTTING FORCE	80 kN
MAX. CUTTING DIAMETER	65 mm²
LENGTH	430 mm
WEIGHT	5,60 kg



SXCG-85
HYDRAULIC CABLE CUTTING HEAD

CUTTING FORCE	80 kN
MAX. CUTTING DIAMETER	85 mm²
LENGTH	470 mm
WEIGHT	7,80 kg



SFK-60SMINI

CRIMPING FORCE	60 kN
CRIMPING RANGE	10 - 300 mm²
HEAD ROTATION	180°
DIMENSIONS	425 x 115 x 75 mm
WEIGHT	4,00 kg
DISPLAY SCREEN	YES



SFK-120L

CRIMPING FORCE	120 kN
CRIMPING RANGE	10 - 400 mm²
HEAD ROTATION	350°
DIMENSIONS	412 x 326 x 78 mm
WEIGHT	6,97 kg
DISPLAY SCREEN	YES



SFK-F19KC

CRIMPING FORCE	19 kN
CRIMPING RANGE	10 - 240 mm²
MAX. KESME ÇAPI	30 mm²
HEAD ROTATION	180°
DIMENSIONS	445 x 115 x 75 mm
WEIGHT	3,70 kg
DISPLAY SCREEN	YES



SFK-65ELEC

CUTTING FORCE	60 kN
MAX. DIA.	65 mm²
HEAD ROTATION	350°
DIMENSIONS	520 x 520 x 80 mm
WEIGHT	6,20 kg
DISPLAY SCREEN	YES



SFK-85ELEC

CUTTING FORCE	60 kN
MAX. DIA.	85 mm²
HEAD ROTATION	350°
DIMENSIONS	540 x 520 x 80 mm
WEIGHT	6,50 kg
DISPLAY SCREEN	YES

CABLE TIES

DNV

UL LISTED

W	L	WHITE	BLACK
2,50	100	SFK-100-25W	SFK-100-25B
	150	SFK-150-25W	SFK-150-25B
	200	SFK-200-25W	SFK-200-25B
3,50	140	SFK-140-36W	SFK-140-36B
	200	SFK-200-36W	SFK-200-36B
	250	SFK-250-36W	SFK-250-36B
	300	SFK-300-36W	SFK-300-36B
	370	SFK-370-36W	SFK-370-36B
4,50	200	SFK-200-45W	SFK-200-45B
	250	SFK-250-45W	SFK-250-45B
	300	SFK-300-45W	SFK-300-45B
	370	SFK-370-45W	SFK-370-45B
	430	SFK-430-48W	SFK-430-48B

W	L	WHITE	BLACK
7,50	300	SFK-300-75W	SFK-300-75B
	370	SFK-370-75W	SFK-370-75B
	450	SFK-450-75W	SFK-450-75B
	550	SFK-550-75W	SFK-550-75B
	610	SFK-610-75W	SFK-610-75B
	750	SFK-750-75W	SFK-750-75B
9,00	600	SFK-600-90W	SFK-600-90B
	710	SFK-710-90W	SFK-710-90B
	760	SFK-760-90W	SFK-760-90B
	900	SFK-900-90W	SFK-900-90B
	1200	SFK-1200-90W	SFK-1200-90B
12,4	720	SFK-720-12,4W	SFK-720-12,4B
	1020	SFK-1020-12,4W	SFK-1020-12,4B



UV CABLE TIES

DNV

UL LISTED

W	L	COLOR	PRODUCT CODE
2,50	100		SFK-100-25UV
	200		SFK-200-25UV
3,50	140		SFK-140-36UV
	200		SFK-200-36UV
	300		SFK-300-36UV
	370		SFK-370-36UV
4,50	200		SFK-200-45UV
	300		SFK-300-45UV
	370		SFK-370-45UV

W	L	COLOR	PRODUCT CODE
7,50	300		SFK-300-75UV
	370		SFK-370-75UV
	450		SFK-450-75UV
	550		SFK-550-75UV
9,00	760		SFK-760-90UV



STAINLESS STEEL CABLE TIES

W	L	PRODUCT CODE
4,5	150	SFK-150-46-W4
	200	SFK-200-46-W4
	250	SFK-250-46-W4
	300	SFK-300-46-W4
	370	SFK-370-46-W4
	450	SFK-450-46-W4
	520	SFK-520-46-W4
	680	SFK-680-46-W4
	840	SFK-840-46-W4
7,9	200	SFK-200-79-W4
	300	SFK-300-79-W4
	370	SFK-370-79-W4
	450	SFK-450-79-W4
	520	SFK-520-79-W4
	680	SFK-680-79-W4
	840	SFK-840-79-W4
	1000	SFK-1000-79-W4

W	L	PRODUCT CODE
4,5	150	SFK-150-46-W5
	200	SFK-200-46-W5
	250	SFK-250-46-W5
	300	SFK-300-46-W5
	370	SFK-370-46-W5
	450	SFK-450-46-W5
	520	SFK-520-46-W5
	680	SFK-680-46-W5
	840	SFK-840-46-W5
7,9	200	SFK-200-79-W5
	300	SFK-300-79-W5
	370	SFK-370-79-W5
	450	SFK-450-79-W4
	520	SFK-520-79-W5
	680	SFK-680-79-W5
	840	SFK-840-79-W5
	1000	SFK-1000-79-W5



RELEASABLE CABLE TIES

W	L	WHITE	BLACK
7,5	200	SFK-200-76RW	SFK-200-76RB
	370	SFK-370-76RW	SFK-370-76RB




SELF-ADHESIVE NYLON SQUARE BASE

W	L	WHITE	BLACK
19	19	SFK-1919YW	SFK-1919YB
28	28	SFK-2828YW	SFK-2828YB



SADDLE NATURAL NYLON SUPPORT

DIMENSIONS	WHITE	BLACK
15x10x7	EM3A	EM3
23x16x9,8	EM5A	EM5



DOWELS, CABLE CLIPS & CABLE TIE ACCESSORIES

W	L	PRODUCT CODE
9,7	43	CH8P

TSE EAC CE RoHS ISO 9001:2015 YERLİ ÜRETİM




BLACK AND TRANSPARENT MACARON

Shrink Ratio: 2/1

mm	BLACK	TRANSPARENT	mm	BLACK	TRANSPARENT
0,8	SM-0,8	SM-0,8T	16	SM-16	SM-16T
1	SM-1	SM-1T	18	SM-18	SM-18T
1,5	SM-1,5	SM-1,5T	20	SM-20	SM-20T
2	SM-2	SM-2T	22	SM-22	SM-22T
2,5	SM-2,5	SM-2,5T	25	SM-25	SM-25T
3	SM-3	SM-3T	28	SM-28	SM-28T
3,5	SM-3,5	SM-3,5T	30	SM-30	SM-30T
4	SM-4,0	SM-4T	35	SM-35	SM-35T
4,5	SM-4,5	SM-4,5T	40	SM-40	SM-40T
5	SM-5,0	SM-5T	45	SM-45	SM-45T
6	SM-6,0	SM-6T	50	SM-50	SM-50T
7	SM-7,0	SM-7T	60	SM-60	SM-60T
8	SM-8,0	SM-8T	70	SM-70	SM-70T
9	SM-9,0	SM-9T	80	SM-80	SM-80T
10	SM-10	SM-10T	90	SM-90	SM-90T
12	SM-12	SM-12T	100	SM-100	SM-100T
13	SM-13	SM-13T	120	SM-120	SM-120T
14	SM-14	SM-14T	150	SM-150	SM-150T
15	SM-15	SM-15T	180	SM-180	SM-180T


- Ultra thin wall
- Flexible
- Halogen Free
- Flame Retardant



YELLOW-GREEN HEAT SHRINK

Macaron Shrink Ratio: 2/1

mm	PRODUCT CODE	mm	PRODUCT CODE	mm	PRODUCT CODE
2,5	SM-2,5SY	9	SM-9SY	35	SM-35SY
3	SM-3SY	12	SM-12SY	40	SM-40SY
3,5	SM-3,5SY	13	SM-13SY	50	SM-50SY
4,5	SM-4,5SY	16	SM-16SY	60	SM-60SY
5	SM-5SY	20	SM-20SY	70	SM-70SY
6	SM-6SY	25	SM-25SY	80	SM-80SY
7	SM-7SY	30	SM-30SY		




SELF-ADHESIVE TUBING

Macaron Shrink Ratio: 3/1

mm	PRODUCT CODE	mm	PRODUCT CODE	mm	PRODUCT CODE
8/2	SM-8/2IYM	33/8	SM-33/8IYM	115/34	SM-115/34IYM
10,2/3	SM-10/3IYM	38/12	SM-38/12IYM	140/42	SM-140/42IYM
12/3	SM-12/3IYM	43,2/12,7	SM-43/12IYM	160/50	SM-160/50IYM
16/5	SM-16/5IYM	55/16	SM-55/16IYM	180/58	SM-180/58IYM
19,1/5,6	SM-19/5IYM	65/19	SM-65/19IYM	200/60	SM-200/60IYM
22/6	SM-22/6IYM	75/22	SM-75/22IYM	230/69	SM-230/69IYM
25/8	SM-25/8IYM	85/25	SM-85/25IYM		
28/6	SM-28/6IYM	95/30	SM-95/30IYM		

- Full moisture sealing
- Strain relief for precision wire connections
- High resistance to impact and abrasion



HEAT SHRINK CABLE JOINT

1 kV AG

mm²	COND.	PRODUCT CODE	mm²	COND.	PRODUCT CODE	mm²	COND.	PRODUCT CODE
6	CU	CJS-4C6	35	CU	CJS-3C35	150	CU	CJS-3C150
10		CJS-4C10	50		CJS-3C50	185		CJS-3C185
16		CJS-4C16	70		CJS-3C70	240		CJS-3C240
		CJS-3C16	95		CJS-3C95			
25		CJS-3C25	120		CJS-3C120			

mm²	COND.	PRODUCT CODE	mm²	COND.	PRODUCT CODE	mm²	COND.	PRODUCT CODE
10	CU	CJD-4C10	35	CU	CJD-3C35	120	CU	CJD-3C120
16		CJD-4C16	50		CJD-3C50	150		CJD-3C150
		CJD-3C16	70		CJD-3C70	185		CJD-3C185
25		CJD-3C25	95		CJD-3C95	240		CJD-3C240

mm²	COND.	PRODUCT CODE	mm²	COND.	PRODUCT CODE	mm²	COND.	PRODUCT CODE
16	AL	CJD-4A16	70	AL	CJD-3A70	185	AL	CJD-3A185
25		CJD-3A25	95		CJD-3A95	240		CJD-3A240
35		CJD-3A35	120		CJD-3A120			
50		CJD-3A50	150		CJD-3A150			

Tork Bağlantı Elemanları A.Ş
Machinery Specialized Organized
Industrial Zone, 27th Street No:6/A
Dilovası/KOCAELİ - TURKEY

www.safakelektrik.com.tr

+90 444 22 08

siparis@safakelektrik.com.tr

Safak®
Perfect
Connection
Kusursuz
Bağlantı